



## FOODLUBE® Universal 2, 0, 000

High performance, multi-purpose, food grade grease  
for maximum bearing life

A truly universal, extreme pressure grease, fortified with PTFE, designed for the enhanced lubrication of all types of ball, roller and plain bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ Also available as an aerosol
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15231	380g
	15236	4kg
	15234	18kg
NLGI 0	15276	4kg
	15274	18kg
NLGI 000	15286	4kg
	15284	18kg



## FOODLUBE® Premier 1

Food grade grease for bearings operating at high speeds and temperatures

A high performance EP grease, fortified with PTFE, designed for enhanced lubrication, particularly high speed and temperature applications.

- ▶ Ideal for electric motors and fan bearings
- ▶ Significantly extends bearing life
- ▶ High load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -30°C to +180°C
- ▶ NSF H1 registered
- ▶ ISO21469 Certified

Description	Part Code	Size
NLGI 1	15291	380g
	15296	4kg
	15294	18kg



## SAPPHIRE® Endure

Premium extreme temperature and chemical resistant grease.

Extreme performance perfluorinated polyether EP grease fortified with PTFE. Designed to operate where conventional greases fail due to chemical contamination or attack.

- ▶ Extreme chemical and solvent resistance
- ▶ Resists caustic wash down
- ▶ Greatly extends lubrication intervals
- ▶ Excellent load carrying and anti-wear properties
- ▶ Extremely stable at high temperatures
- ▶ Approved by Rolls Royce for use on Harrier Pegasus
- ▶ Thrust Nozzle Drive Mechanism
- ▶ Also approved for Submarine Clearance
- ▶ Temperature range of -25°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	12330	100g
	12331	700g
	12334	1kg
	12336	5kg
	12337	18kg



## FOODLUBE® Hi-Temp 2

### High temperature food grade grease

A silicone grease fortified with PTFE, suitable for high temperature applications. Designed for the lubrication of all types of slower bearings and sliding surfaces.

- ▶ Good anti-wear properties
- ▶ Highly resistant to wash off
- ▶ Ideal for rubbers and plastics
- ▶ Opaque appearance
- ▶ Good chemical resistance
- ▶ Temperature range -20°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15251	380g
	15256	4kg
	15254	18kg



## FOODLUBE® Endure 00

### Premium, food grade lubricant for extreme temperatures

Extreme performance semi-fluid perfluorinated polyether extreme pressure grease fortified with PTFE.

- ▶ Extremely stable at high temperatures
- ▶ Greatly extends lubrication intervals
- ▶ Excellent chemical and solvent resistance
- ▶ Excellent high load and anti-wear properties
- ▶ Wide temperature range of -25°C to +280°C
- ▶ Ideal for bakery oven chains
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15503	525g



## FOODLUBE® Spray Grease

### Food grade, multi-purpose, extreme pressure grease fortified with PTFE in aerosol

FOODLUBE Spray Grease is FOODLUBE Universal 2 in an aerosol can for convenient application. It is a white, non-toxic lubricant designed for the effective lubrication and protection of ball, roller and plain bearings, slides, pins, linkages and bushes operating in food, pharmaceutical and other clean environments.

- ▶ Offers an excellent wide temperature resistance of -50°C to +160°C.
- ▶ Highly resistant to water wash-off and offers excellent corrosion protection
- ▶ Excellent oxidation stability resulting in extended relubrication intervals and a reduction in lubricant usage
- ▶ Excellent all round, long life lubricant fortified with PTFE for improved lubricity and performance
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15030	400g



## FOODLUBE® Extreme

### Food grade grease for extremely wet applications

A highly tenacious extreme pressure bearing grease with superior performance in wet conditions, for the lubrication of all types of ball, roller and plain bearings.

- ▶ Superior water resistance
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Significantly extends bearing life
- ▶ Temperature range -30°C to +160°C
- ▶ NSF H1 registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2	15241	380g
	15246	4kg
	15244	18kg



## FOODLUBE® Ultra

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Adhesive, multipurpose extreme pressure grease. Designed for the effective lubrication of slides, cams, gears and plain bearings.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Description	Part Code	Size
NLGI 2/3	15811	380g
	15816	4kg
	15814	18kg



## FOODLUBE® Auto SF

**A highly adhesive food grade grease for plain bearings and sliding surfaces**

Designed specifically for automatic lubrication systems, where long pipe runs and small bore piping cause blockage or delivery issues. Formulated to deliver all of the benefits expected from ROCOL long life greases with the added benefit of pump-ability.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off
- ▶ Excellent corrosion protection
- ▶ High load and wear properties
- ▶ Temperature range -15°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15912	4kg
15913	18kg
15914	160kg



## FOODLUBE® Autolube Complete & Refill

**Food grade, electromechanical grease dispenser for trouble free lubrication**

Electromechanical, fully automatic lubrication system containing FOODLUBE Premier 1. Delivers exact quantities of grease, over varied time periods, to all types of ball, roller and plain bearings.

- ▶ Selectable 1,3,6, or 12 month dispensing periods
- ▶ Easy to install and maintain
- ▶ Ideal for non-accessible areas
- ▶ Grease temperature range -50°C to +160°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

Part Code	Size
15220	120ml
15224	120ml



## FOODLUBE® UNILUBE

**Food grade, multipurpose, extreme pressure (EP) grease with PTFE in an automatic lubricator**

A gas activated lubricant dispenser filled with FOODLUBE Premier 1 grease. Provides consistent and constant lubrication of all types of ball, roller and plain bearings.

- ▶ 120ml capacity
- ▶ Compact design enabling application in hard to reach places
- ▶ Transparent housing making it easier to monitor lubricant levels
- ▶ Variable from 1 – 12 monthly increments
- ▶ Fully automatic
- ▶ Easy to install and maintenance free
- ▶ Grease Temperature range -30°C to +180°C
- ▶ UNILUBE temperature range -20°C to +55°C
- ▶ NSF H1 Registered

Part Code	Size
13010	120ml



## HT70

**Extremely high temperature bearing grease for slow speeds**

A unique molybdenum disulphide grease for slow moving, high temperature bearing applications.


- ▶ Ideal for rotary rack oven bottom bearings
- ▶ Designed for slow speed applications typically <300rpm
- ▶ Extremely slow evaporation at elevated temperatures
- ▶ Minimal deposit formation against conventional lubricants
- ▶ Molybdenum disulphide provides emergency lubrication
- ▶ Wide temperature range: +180°C to +300°C
- ▶ NSF H2 Registered

Part Code	Size
12106	4kg



A comprehensive range of products designed to lubricate and protect chains operating in the food and clean industries. Whatever the type of drive or conveyor chain in use, ROCOL can provide a lubricant to ensure trouble free operation – cutting expensive downtime and increasing productivity.

## Selection Chart

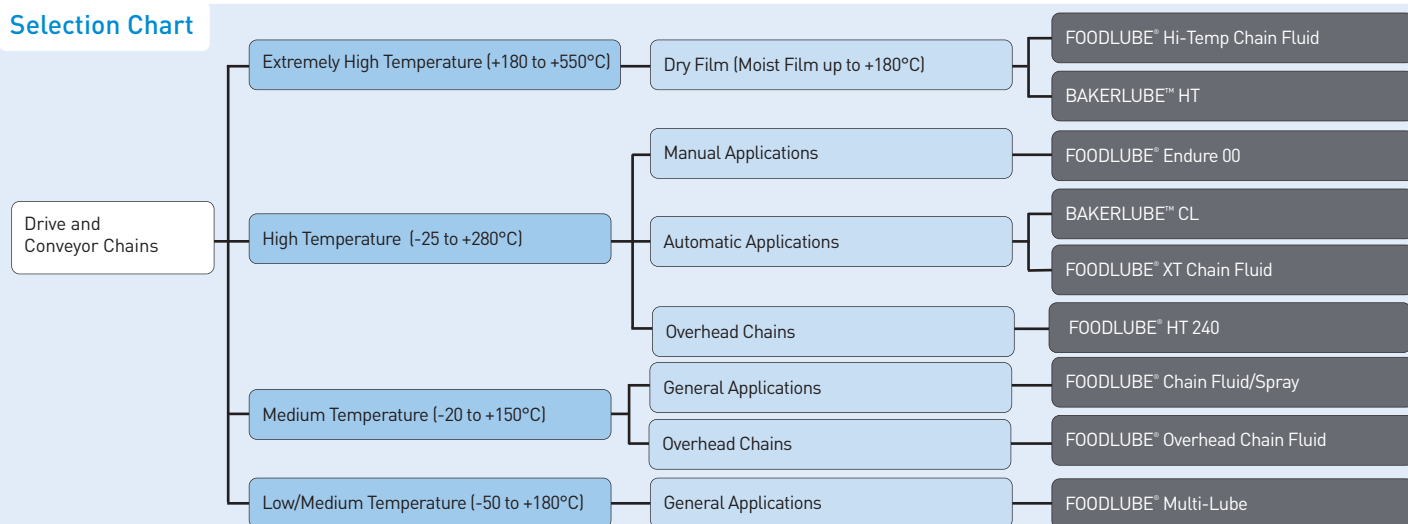

## FOODLUBE® Chain Fluid

**Tenacious, food grade lubricant for extended chain life**

Versatile, high performance, chain lubricant suitable for all types of drive and conveyor chains

- ▶ Excellent penetration properties
- ▶ Tenacious low drip formulation
- ▶ Outstanding corrosion protection
- ▶ Good load carrying capacity
- ▶ Good resistance to water wash off
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15506	5L
15505	20L



## FOODLUBE® Chain Spray

**Tenacious, food grade spray lubricant for extended chain life**

Convenient aerosol chain lubricant. Ideal for lubrication of all types of drive and conveyor chains.

- ▶ Outstanding penetration properties
- ▶ Highly resistant to water wash off
- ▶ Good water displacing properties
- ▶ Tenacious low drip formulation
- ▶ Good load carrying capacity
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15610	400ml



## FOODLUBE® XT Chain Fluid

**Formulated from a combination of synthetic esters and a special antioxidant package**

Ensures the highest performance in terms of thermal stability, low evaporation loss and minimal deposit formation

- ▶ Excellent penetration properties
- ▶ Low evaporation rates – low fuming and longer wet film life
- ▶ Low deposit and varnish formation
- ▶ Excellent anti wear properties
- ▶ Temperature range -0°C to +280°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15800	20L
15801	200L



## FOODLUBE® Chain Fluid UNILUBE

**Highly adhesive, food grade lubricant for overhead chains**

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Grease Temperature range -20°C to +150°C
- ▶ Autolube dispenser temperature range 0°C to +50°C
- ▶ NSF H1 Registered

Part Code	Size
15502	120ml



## FOODLUBE® Overhead Chain Fluid

**Highly adhesive, food grade lubricant for overhead chains**

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Extremely tenacious film
- ▶ No drip formulation
- ▶ Excellent corrosion protection
- ▶ Good water wash off properties
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15786	5L
15785	20L



## FOODLUBE® HT 240

**Long lasting, high temperature, food grade chain lubricant**

Non-toxic, water resistant lubricant designed primarily for the effective lubrication of all types of high temperature chains & conveyors operating in food, pharmaceutical and other clean environments.

- ▶ Excellent high temperature resistance up to +240°C
- ▶ Good penetration and load carrying properties ensuring that the product lubricates and protects inside rollers, links, pins etc
- ▶ Highly adhesive providing excellent water wash-off resistance and corrosion protection
- ▶ Extremely low evaporation rate resulting in a long wet life at high temperatures for maximum lubricant economy
- ▶ NSF H1
- ▶ ISO 21469 Certified

Part Code	Size
16765	20L



## FOODLUBE® Hi-Temp Chain Fluid

**Food grade chain lubricant for extreme temperatures**

Extreme high temperature chain lubricant for all types of drive and conveyor chains.

- ▶ High load carrying performance
- ▶ Extended lubrication intervals
- ▶ Clean evaporating base oil
- ▶ For temperatures where conventional fluids fail
- ▶ Solvent free formulation
- ▶ Temperature range; wet film range -10°C to +180°C
- ▶ Temperature range; dry film up to +550°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15306	5L
15305	20L





## BAKERLUBE™ HT

High temperature, graphited, synthetic lubricant for bakery oven chains

Extreme high temperature graphited chain lubricant for bakery oven chains.

- ▶ High load carrying performance
- ▶ Clean evaporating base oil
- ▶ For temperatures where conventional fluids fail
- ▶ Does not contain solvents
- ▶ Temperature range; wet film -10°C to +180°C
- ▶ Temperature range; dry film up to +550°C
- ▶ NSF H2 Registered

Part Code  
15705

Size  
20l



## BAKERLUBE™ CL

High temperature, synthetic lubricant for bakery oven chains

High temperature, long life, extreme pressure chain and conveyor lubricant.

- ▶ Outstanding resistance to oxidation
- ▶ Solvent free formulation
- ▶ Excellent penetration
- ▶ Clean, residue free film
- ▶ Suitable for automatic lubricators
- ▶ Temperature range 0°C to +280°C
- ▶ NSF H2 Registered

Part Code  
15605

Size  
20l



## BAKERLUBE™ WG

High temperature, water based, graphited chain and conveyor lubricant

BAKERLUBE WG is a water based, graphited, high temperature dry film chain lubricant. It is specifically formulated for the lubrication of oven chains subjected to extreme temperatures of up to +550°C. Ideal for the lubrication of conveyor chains in high temperature environments where the risk of contamination by a wet lubricant cannot be tolerated.

- ▶ Fume free
- ▶ Excellent penetration and performance
- ▶ Does not attract dirt or dust
- ▶ Good corrosion protection
- ▶ Excellent extreme pressure (EP) and anti-wear properties
- ▶ Temperature range of +10°C to +80°C
- ▶ Dry film lubrication up to +600°C
- ▶ NSF H2 Registered


Part Code  
15805

Size  
20l



ROCOL manufacture a comprehensive range of gear, compressor and hydraulic oils which are designed to provide extended service life, thereby reducing maintenance time and costs.

## Selection Chart

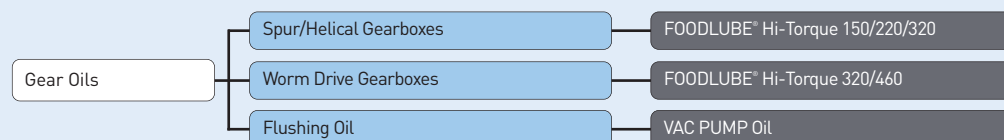


If you require help in selecting a product, [contact ROCOL® direct: +44 \(0\) 113 232 2600](#)

## FOODLUBE® Hi-Torque

### Food grade gear oil with start up protection system

High performance fully synthetic gear oils incorporating start up protection system (SUPS) and anti wear additives to provide maximum lubrication and protection in all types of gearboxes.

- ▶ SUPS – A unique protection for gear teeth on start up and in use
- ▶ Outstanding load carrying performance: FZG load stage 12
- ▶ Excellent anti-wear performance - no need for additional additive treatments
- ▶ Temperature range -20°C to +150°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

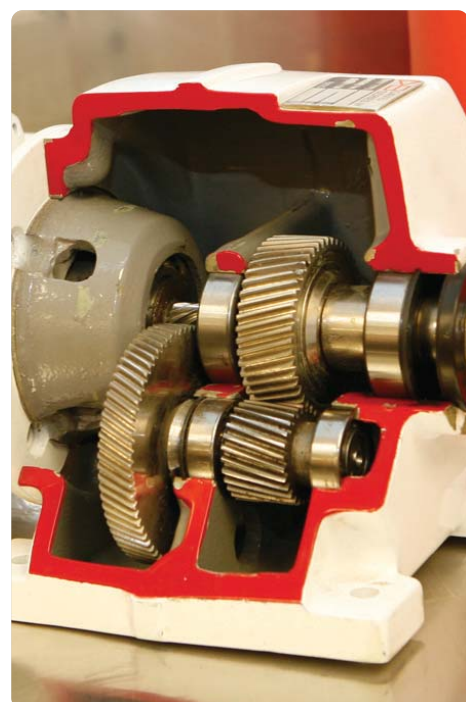

Description	Part Code	Size
Hi-Torque 150	15426	5L
	15425	20L
	15429	200L



Description	Part Code	Size
Hi-Torque 220	15526	5L
	15525	20L
	15529	200L



Description	Part Code	Size
Hi-Torque 320	15766	5L
	15765	20L
	15769	200L




Description	Part Code	Size
Hi-Torque 460	15776	5L
	15775	20L
	15779	200L



# FOOD GRADE HYDRAULIC, COMPRESSOR AND VACUUM PUMP OILS



COMPRESSOR AND  
HYDRAULIC OIL



## FOODLUBE® Hi-Power Fluids

High performance, food grade oils for compressor, hydraulics and airline systems

High performance, fully synthetic oils incorporating an optimum blend of high performance additives. Suitable for use in hydraulics, air compressors and airline systems.

- ▶ Unique L-CO system, reduces carry over
- ▶ Enhanced oxidation stability
- ▶ Extremely low sludge and varnish build up
- ▶ Minimal foaming
- ▶ Temperature range -20°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified



Description	Part Code	Size
Hi-Power 22	15796	5L
	15795	20L
	15799	200L
Hi-Power 32	15896	5L
	15895	20L
	15899	200L
Hi-Power 46	15996	5L
	15995	20L
	15999	200L
Hi-Power 68	16006	5L
	16005	20L
	16009	200L
Hi-Power 100	15946	5L
	15945	20L
	15949	200L

## VAC PUMP Oil

Food grade lubricant for extended vacuum pump life

High performance lubricating fluid for use in all vac pumps.

- ▶ Extended life
- ▶ Suitable for high load and high pressure conditions
- ▶ Clean and low odour
- ▶ Low deposit formation
- ▶ Prevents corrosion from moisture ingress
- ▶ Ideal for use as gear box flushing oil
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
16806	20L
16805	200L



## RAPID DEMULSE 220

High performance, food grade oil which rapidly separates from water and prolongs service life

High performance oil formulated to maximise lubricant and machine lifetime of water cooled homogenisers and similar systems.

- ▶ Rapid water demulsification under conditions of high load and elevated temperature
- ▶ Allows quick water drainage for reduced downtime
- ▶ Good wear protection properties
- ▶ Clean, low odour product
- ▶ Temperature range -5°C to +130°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15965	20L
15969	200L



## REFRIGERATION Compressor Oil

Non waxing fluid for most types of refrigeration compressors

A low temperature lubricant specifically designed for refrigeration compressor systems.

- ▶ No waxing
- ▶ Clean fluid in operation – suitable for recirculation
- ▶ Compatible with all common refrigerants including ammonia
- ▶ Low carry over into refrigerant, reducing oil consumption
- ▶ Extremely low pour point -45°C.
- ▶ NSF H2 Registered

Part Code	Size
31009	200L







A range of premium, food grade, quality products which protect fasteners against heat and corrosive attack, and ease future dismantling thereby reducing downtime and costs.

## FOODLUBE® Multi-Paste

**Food grade, multi-purpose anti-seize & lubricating paste**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Wide temperature range –30°C to +450°C
- ▶ NSF H1 registered
- ▶ ISO 21469 Certified

Part Code	Size
15750	85g
15851	400g
15753	500g
15756	5kg



## FOODLUBE® Multi-Paste Spray

**Food grade, multi-purpose anti-seize and lubricating spray**

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears in a convenient aerosol spray.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ For high temperature applications
- ▶ Prevents galling & pick-up on assembly
- ▶ Extremely tenacious – resists water wash out
- ▶ Temperature range –30°C to +450°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15751	400ml



## FOODLUBE® Dismantling Spray

**Highly penetrating food grade release spray**

A fast acting penetrating spray for the fast and effective release of corroded and seized components.

- ▶ Highly efficient penetration
- ▶ Short term corrosion protection for released parts
- ▶ Temperature range –20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15720	300ml




## SHOCK-RELEASE Spray

**Food grade release and dismantling lubricant with shock freeze action**

A release and dismantling lubricant which rapidly frees fittings, fasteners and mechanical assemblies seized by dirt and corrosion.

- ▶ Freezing action causes micro-cracking for rapid release
- ▶ Advanced synthetic base oils for highly effective dismantling
- ▶ Extremely low odour
- ▶ Reinforced with sub micron PTFE
- ▶ Safe for use on all metals, common plastics and rubbers
- ▶ Shock cooling temperature –40°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
32040	400ml

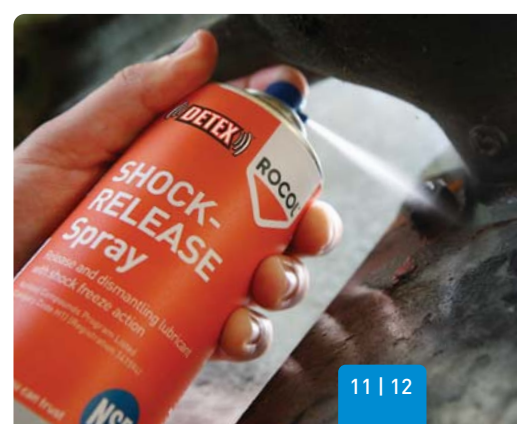

ROCOL food grade corrosion preventatives protect metal components, extending working life and reducing the need for rework and repair.

## Selection Chart

Corrosion Protection

Removable Film

Waxy Film

FOODLUBE® Protect Spray

If you require help in selecting a product, [contact Rocol direct](mailto:contact@rocol.com): +44 (0) 113 232 2600

## FOODLUBE® Protect Spray

**High performance, food grade, long-term corrosion protection**

Effective heavy duty, waxy film for long term corrosion protection for all metal parts.

- ▶ Excellent corrosion protection outdoors for up to 2 years
- ▶ Clean, white visible film
- ▶ Resilient to aggressive cleaning
- ▶ Water displacing for immediate protection
- ▶ Acts as a dry film lubricant - fortified with PTFE
- ▶ Temperature range -40°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified


Part Code  
15020

Size  
300ml



A comprehensive range of products designed to meet the essential cleaning requirements of all maintenance jobs.

## Selection Chart

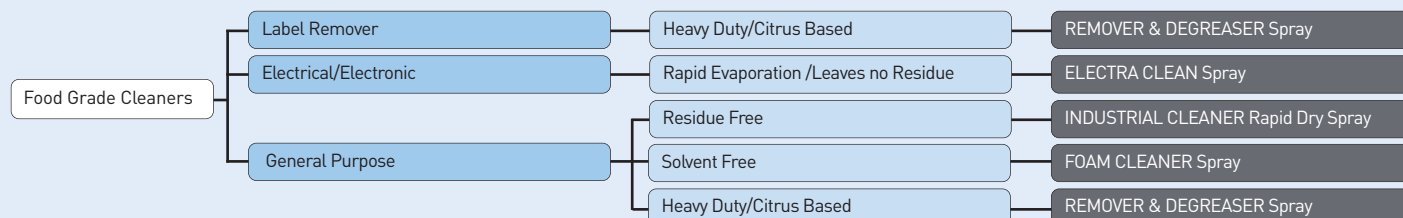

If you require help in selecting a product, [contact ROCOL direct: +44 \(0\) 113 232 2600](tel:+4401132322600)

## FOAM CLEANER Spray

**Powerful, fast acting, aqueous, food safe foaming cleaner**

Universal fast acting foaming cleaner, cuts through grease, dirt and grime.

- ▶ Stainless Steel cleaner
- ▶ Active foaming
- ▶ Ideal for non-porous surfaces
- ▶ Safe for use on most plastics rubbers and painted surfaces
- ▶ Free from solvents
- ▶ NSF A1 Registered

**Part Code**  
34141

**Size**  
400ml



## INDUSTRIAL CLEANER Rapid Dry Spray

**Food grade, solvent based multi-purpose cleaner**

A multi-use, fast drying, powerful solvent cleaner designed to evaporate quickly leaving no residue.

- ▶ A specially formulated blend of degreasing solvents
- ▶ Designed to remove grease, oil and workshop grime from all surfaces
- ▶ Safe on metal, most plastics and paints
- ▶ NSF K1 Registered

**Part Code**  
34131

**Size**  
300ml



## ELECTRA CLEAN Spray

**Food grade, residue free, high performance electrical cleaner**

A powerful, ultra fast drying cleaner designed for use on electrical equipment and components such as switches and switchgear.

- ▶ Rapid evaporation to leave no residue
- ▶ Designed for effective degreasing and cleaning
- ▶ Removes light to medium grease and oil contamination
- ▶ Compatible with most plastics
- ▶ NSF K2 Registered

**Part Code**  
34066

**Size**  
300ml



## REMOVER & DEGREASER Spray

**Heavy duty, citrus based cleaner and label remover**

A heavy duty, multi-purpose citrus degreaser ideal for removing grease, oil, adhesives, labels and general workshop grime.

- ▶ Pleasant characteristic odour
- ▶ Powerful and fast acting
- ▶ Safe on metal, most plastics and painted surfaces
- ▶ NSF C1 Registered

**Part Code**  
34151

**Size**  
300ml



# FOOD GRADE MULTI-PURPOSE MAINTENANCE PRODUCTS




MULTI-PURPOSE  
MAINTENANCE PRODUCTS



The ROCOL range of general purpose food grade maintenance products are designed to be an easy to use and cost effective part of any maintenance program in the food, clean and pharmaceutical industries.

## Selection Chart

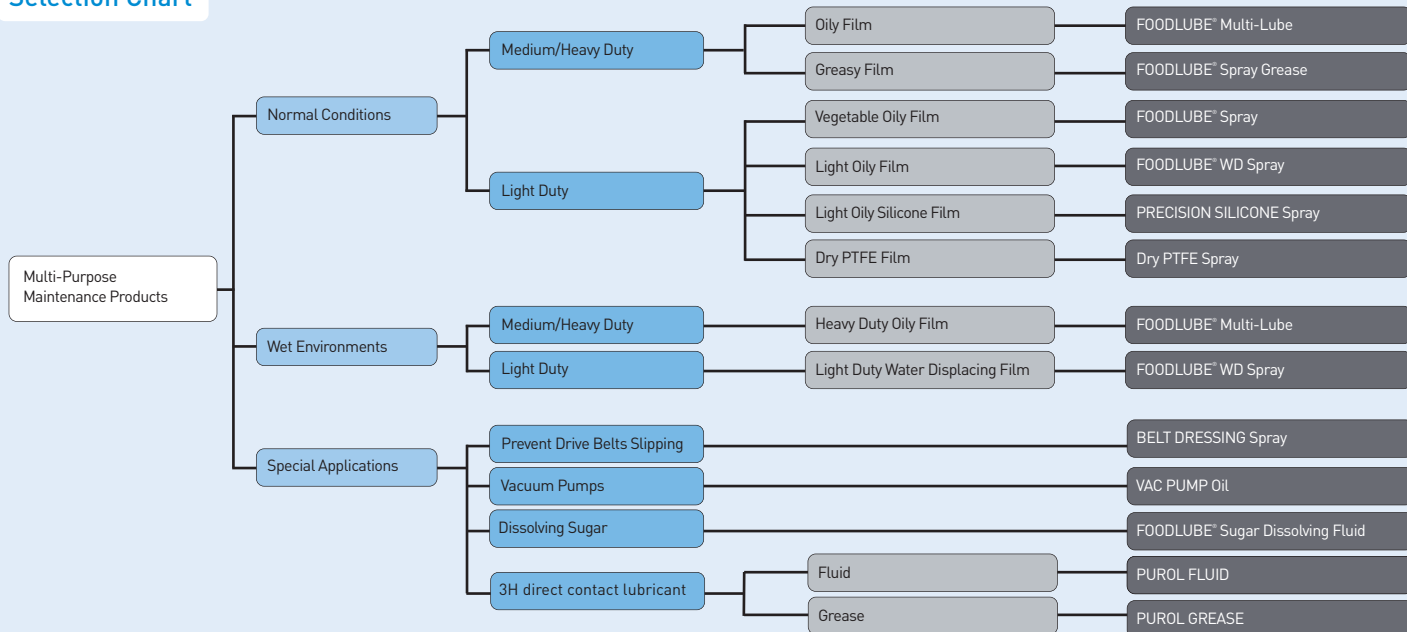

## FOODLUBE® Multi-Lube Fluid

**Food grade, multi-purpose lubricant fortified with PTFE**

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range -50°C to +180°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15120	500ml
15126	5L



If you require help in selecting a product,  
contact ROCOL® direct: +44 (0) 113 232 2600

## FOODLUBE® Spray

**High performance, aerosol propelled food grade lubricant**

High performance versatile lubricant spray for all-round light lubrication of small bearings, pins, bushes and slides.

- ▶ Long lasting protective film
- ▶ Good corrosion protection
- ▶ Temperature range -20°C to +110°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15710	300ml



## FOODLUBE® WD Spray

**Food grade water displacing & lubricating spray with PTFE**

The No. 1 food safe multi-purpose spray for general use in food, beverage and pharmaceutical plants.

- ▶ Clean, non toxic, water displacing spray
- ▶ PTFE fortified
- ▶ Silicone free formulation
- ▶ Excellent anti-wear and lubricating properties
- ▶ Superior penetrating and cleaning performance
- ▶ Outstanding corrosion protection
- ▶ Temperature range -50°C to +120°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15010	300ml







## FOODLUBE® Spray Grease

**High performance, multi-purpose, food grade grease**

Multi-purpose extreme pressure spray grease, fortified with PTFE, designed for the enhanced lubrication of all types of slides, bushes, pins and bearings.

- ▶ Significantly extends bearing life
- ▶ Superior load and wear properties
- ▶ Highly resistant to water washout
- ▶ Excellent corrosion protection
- ▶ Wide temperature range -50°C to +160°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15030	400ml



## DRY PTFE Spray

**Food grade, premium performance, invisible dry film lubricant**

Market leading, low friction, non stick, PTFE lubricant for the dry lubrication of cams, slides, open bearings, chutes and shears.

- ▶ Non staining, friction reducing film
- ▶ High percentage, industry leading PTFE content
- ▶ Approved to Rolls Royce, Naval and NATO Standards
- ▶ Wide temperature range -200°C to +270°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34235	400ml



## PRECISION SILICONE Spray

**Food grade, high performance, silicone aerosol**

A high performance, colourless non stick lubricating film with wide temperature stability for use on slides, chutes, bearings and conveyors.

- ▶ Extended life and reduced waste due to significantly higher levels of active ingredient.
- ▶ Resists oxidation and corrosion
- ▶ Non toxic, clean and colourless
- ▶ Approved to NATO Standards
- ▶ Wide temperature range -50°C to +200°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34035	400ml



## BELT DRESSING Spray

**Food grade spray to eliminate belt slip and maximise belt life**

The original spray for conditioning and lubricating all types of drive and conveyor belts.

- ▶ Adheres strongly to any belt material
- ▶ Gives instant grip, prevents glazing and reduces slippage
- ▶ Conditions to prevent cracking and breakage
- ▶ Resists build up of grease and dirt
- ▶ Non toxic and colourless
- ▶ Temperature range -50°C to +100°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
34295	300ml



## FOODLUBE® Sugar Dissolving Fluid

**Food grade spray to dissolve and remove sugars and fondants from all surfaces**

Rapidly dissolves all sugars and fondants from all surfaces leaving a light lubricating, protective film.

- ▶ Rapid penetrating action
- ▶ Protects against corrosion
- ▶ Available in bulk and easy to apply trigger spray
- ▶ Temperature range +5°C to +95°C
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

Part Code	Size
15110	500ml
15116	5l





# FOOD GRADE SEAMER FLUIDS



MULTI-PURPOSE  
MAINTENANCE PRODUCTS



## FOODLUBE® SEAMER FLUID 150

**Food grade, multi-purpose lubricant fortified with PTFE**

A fully synthetic, multi-purpose lubricant, fortified with PTFE for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration
- ▶ Good load carrying properties
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack
- ▶ Temperature range  $-50^{\circ}\text{C}$  to  $+180^{\circ}\text{C}$
- ▶ NSF H1 Registered
- ▶ ISO 21469 Certified

**Part Code**  
16029

**Size**  
200L



# FOOD GRADE

## PUROL™ 3H LUBRICANTS

### FOR DIRECT FOOD CONTACT



MULTI-PURPOSE  
MAINTENANCE PRODUCTS



## PUROL™ GREASE

**3H direct food contact, multi functional grease**

ISO 21469 certified multi-purpose grease and food processing release agent for direct food contact.

- ▶ NSF-3H registered: Release agent for direct contact with food
- ▶ NSF-H1 registered: Safe for incidental contact with food
- ▶ Does not contain animal derived materials, nut oils or genetically modified ingredients
- ▶ Reduces equipment down-time
- ▶ Increases re-lubrication intervals
- ▶ Excellent temperature resistance (-10°C to +110°C)
- ▶ Easy targeted application by grease gun or manually
- ▶ Excellent technical support and service engineers

Part Code	Size
15611	370g
15616	4kg



## PUROL™ FLUID

**3H direct food contact, multi-functional oil**

PUROL Fluid is a clear, non toxic lubricant designed for the effective lubrication and protection of seals, guides, bearings and blades particularly those operating in food, pharmaceutical and other clean environments where direct food contact is inevitable.

- ▶ NSF-3H registered-for direct contact with food
- ▶ NSF-H1 registered-safe for incidental food contact
- ▶ Less risk of contamination
- ▶ ISO 21469 certified-audit trail peace of mind
- ▶ Excellent wide temperature resistance -10°C to +110°C
- ▶ Good oxidation stability results in extended lubrication intervals
- ▶ For use as a direct food contact release agent and as a lubricant
- ▶ Suitable for protecting knives and surfaces from corrosion

Part Code	Size
15617	500ml
15618	5L
15619	20L
15620	200L

